


Model Number Chart for Pulley Style Gearbox

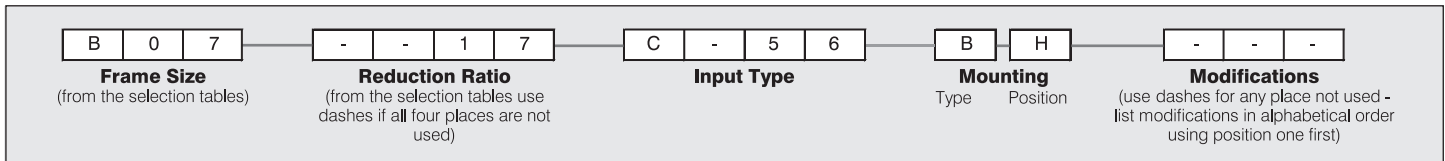

INPUT TYPE

Input Shaft	SHFT
Pulley Connection	PULY

Standard Quill Style NEMA C-Face Input

Motor Size	Ordering Code
56C	C-56
143/145TC	C140
182/184TC	C180
213/215TC	C210
254/256TC	C250
284/286TC	C280
324/326TC	C320

For coupling style C-Face adapters, please change "C" to "A" in the ordering code

MOUNTING TYPE		MOUNTING POSITION	
Mounting Type.....	Ordering Code	Mounting Position.....	Ordering Code
Flange	F	Horizontal	H
Ring	R	Vertical Output Shaft Down	D
Hollow Shaft	H	Vertical Output Shaft Up	U

Modifications

USDA approved food grade lubricant	F
Grease lubrication, standard lubrication	K
Low temperature lubricant (-4°F to 32°F ambient temperatures)	L
Taper pins (for extreme reversing load applications)	T
Washdown modifications (a stainless steel sleeve under the output shaft seal, a V-ring deflector on the output shaft, a sealed motor shaft bearing for vertical output shaft down units, and a washdown breather for oil filled units. This modification reduces the usable shaft length)	W
White epoxy paint	X
Washdown modifications with white epoxy paint	Y
Steel-It® paint	B
Washdown modifications with Steel-It® paint	C
Precision backlash	P