


# Circulate 3000

## Dimensions Shovel Base & Top Mount Adaptor

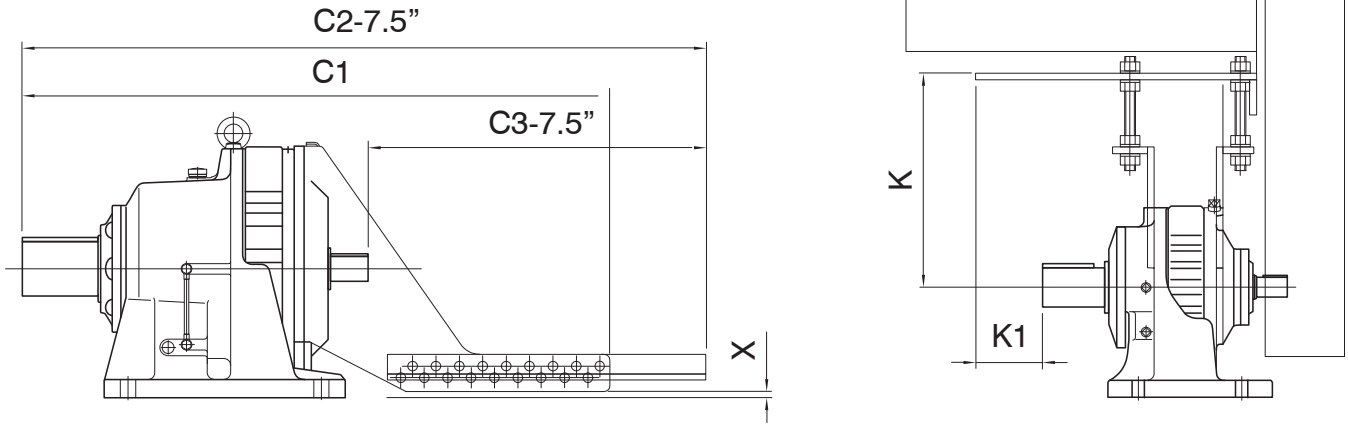

Frame Size	Shovel Base						Top Mount				
	Motor Frame Size	C1	C2	C3	X	Net Weight (lb)	Motor Frame Size	K		K1	Net Weight (lb)
C01 - C07	56-184T	31.10	34.35	21.63	0.76	93	56-184T	7.90	10.90	4.84	87
D01 - D07	143T-215T	32.04	38.29	24.12	0.95	162	145T-256T	9.20	12.20	3.59	140
E01 - E07	182T-256T	35.94	42.18	22.69	0.65	290	182T-256T	11.40	14.40	0.92	288
F03 - F07	213T-286T	37.27	47.24	24.29	2.40	590	213T-326T	15.10	18.10	-0.98	562


Notes: All dimensions are in inches.

For Top Mount, total V-drive drive centers = "K" dimension listed PLUS motor "D" dimension.

Top Mount can be rotated. Contact NIDEC-SHIMPO Customer Service for additional information.

Dimensions subject to change without notice.

## Dimensions C-Face Adapter

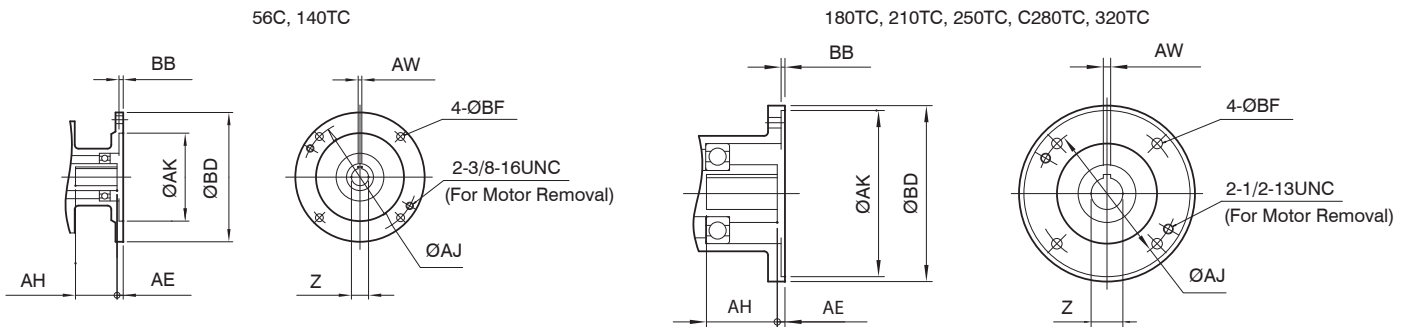

C-Face Motor Size	AE	AH	AJ	AK	AW	BB	BD	BF	Z
56C	0.31	1.92	5.875	4.50	0.188	0.217	6.61	0.40	0.625
140TC	0.39	2.13	5.875	4.50	0.188	0.217	6.61	0.40	0.875
180TC	0.39	2.60	7.250	8.50	0.250	0.217	9.00	0.54	1.125
210TC	0.39	3.15	7.250	8.50	0.313	0.197	9.00	0.54	1.375
250TC	0.39	3.62	7.250	8.50	0.375	0.217	9.00	0.54	1.625
280TC	0.47	4.33	9.000	10.50	0.500	0.217	11.14	0.54	1.875

Notes:

All dimensions are in inches.

Dimensions subject to change without notice.